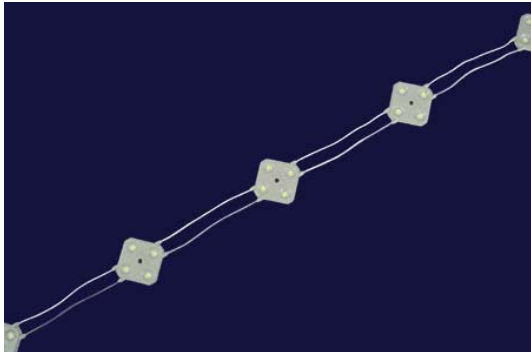


BACKlight Protect

BL04P

**Benefits**

- One reel comes with two LED chains
- For any shape of channel letter
- Easy and fast installation
- Ingress protection IP66 of the LED boards

Applications

- Illuminated signs
- Channel letters

Technical Operating Data

Product	Color	Number of LEDs	Voltage [V DC]*	Power [W]*	Current [A]*	Radiance Angle [°]*	Wavelength [nm] Color Temp [K]*	Lum. Flux [lm]*
BL04LP-W3F-865	white	240	10	44,0	4,2	120	6500 K	880

*) All Data are related to the entire module

Due to the special conditions of the manufacturing processes of LED the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.

+) Preliminary Data

Technical Features


- One reel comes with two LED chains
- Four LED per single printed circuit board
- Total length for BL04LP version is max. $2 \times 3.60 \text{ m} = 7.20 \text{ m}$
- Module separable into operable subunits; smallest section comprises 1 LED board
- One chain consists of 30 LED coupons connected with flexible cables
- Mounting holes ($\varnothing 3 \text{ mm}$) allow easy installation
- Parallel connection up to two LED chains with power feed in the centre of one OT 50W
- Up to 50,000 h lifetime
- Special encapsulation of the LED boards for maximum robustness during installation and operation

Minimum and Maximum Ratings

Product	Operating Temperature at Tc-Point [°C] *	Storage Temperature [°C] *	Voltage Range [V dc] *	Reverse Voltage [V dc] *
BL04LP-W3F-865	-20 ... 85	-20 ... 85	10 ... 11	0

*) Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED Module.
 Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED Module.
 The temperature of the LED module must be measured at the Tc-point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label. For exact location of the Tc-point see drawing below.

Drawing

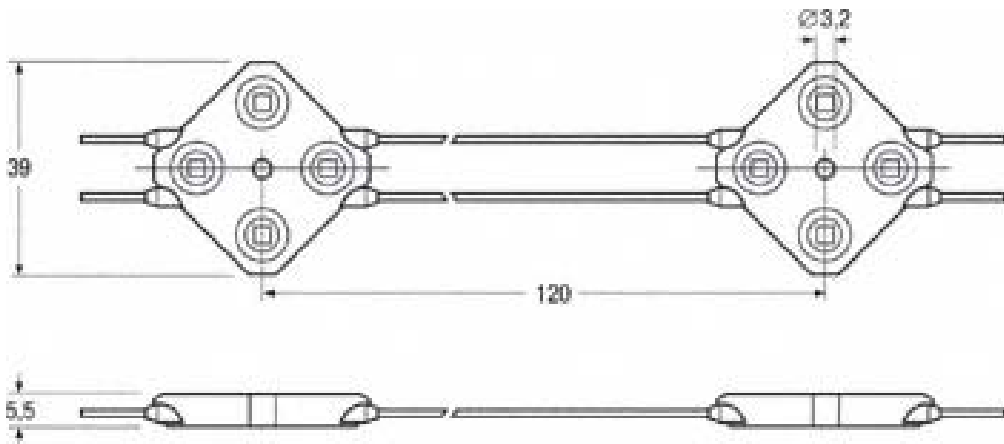

Alle Angaben in mm./
 All data in mm.

Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.

The LED Module incorporates no protection against short circuits, overload or overheating. Therefore it is absolutely necessary to operate the modules with a electronically stabilised power supply offering protection against the above mentioned safety risks. For dimming applications attention should be paid to specific references in "OPTOTRONIC © Technical Guide".

OSRAM OPTOTRONIC © power supplies are specifically designed with protection features for safe operation.

When using power supplies other than OPTOTRONIC © the following basic safety features are required, in addition to any other application specific concerns and local safety codes:

- Short circuit protection
 - Overload protection
 - Overheat protection
-
- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
 - Observe correct electrical polarity!
For all W3 / W3F types (except LM10P / LD06A / DC02A) wrong polarity will lead to emission of red light. Attention, the module can be destroyed! Correct polarity immediately!
For all other types, including LM10P / LD06A / DC02A), wrong polarity will lead to no light emission only (see also reverse voltage, page 2)
 - Parallel connection is highly recommended as safe electrical operation mode.
Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the LED module.
 - Detach each circuit board unit of the LED-chain exclusively by cutting the connecting cables. For colour white the wires can be cut at any interval between printed circuit boards.
 - Electrical contact is achieved with the contact cables. A maximum of one LED-chain can be installed with power feed from one end. Operation with more than one consecutive LED-chain, power feed from one end only, will reduce photometric performance and exceed the current carrying capacity of the LED-chains.
 - Installation with more than one LED-chain on one OPTOTRONIC© 50W has to be realised by either feeding the power to the centre or by splitting the power feed to contact groups of single LED-chains.
 - When using power supplies other than OPTOTRONIC© the maximum number of LED-chains on one 50 W power supply is 2 pieces. Otherwise overloading may occur.

Assembly Information

- To connect the LED-chain with each other or with OPTOTRONIC® Power Supply we recommend standard clamps. (e.g. WAGO 243-214 or 224-201)

Ordering Guide

Productgroup	Productname	EAN *	S-Unit *
BACKlight Protect	BL04LP-W3F-865	4008321260369	5

*) EAN: Ordering number per single module
S-Unit: Modules per shipping unit

Note: Typical performance data are subject to change without any further notice, particularly as LED technology evolves.

Sales and Technical Support

OSRAM GmbH

Hellabrunner Strasse 1
D - 81536 München
Germany
www.osram.com
+49 (0)89 6213-0

Sales and technical support is given by the local OSRAM subsidiaries.
On our world wide homepage all OSRAM subsidiaries are listed with complete address and phone numbers.